




EUROPEAN - ASIAN APPLICATIONS

TYPE	AH	CCA(-18°C) SAE	DIMENSIONS			TERMINALS	APPLICATIONS
			L	W	H		
40A-SMFLS	40	300	187	127	226	RIGHT	Hyundai Atos
40A-SMFL	35	300	187	127	226	RIGHT	Asian
40A-SMFR	35	300	187	127	226	LEFT	Asian
40A-SMF	40	350	175	175	190	RIGHT	European
44A-SMF	44	360	207	175	175	RIGHT	European
45A-SMF	45	400	238	129	225	RIGHT	Asian
45A-SMFLS	45	400	238	129	225	RIGHT	Low
45A-SMFRS	45	400	238	129	225	LEFT	Low
50A-SMF	50	380	208	175	190	RIGHT	European
53A-SMF	53	460	242	175	175	RIGHT	European
55A-SMF	55	500	242	175	175	RIGHT	European
60A-SMF	60	480	242	175	190	RIGHT	European
60A-SMFL	60	500	232	173	225	RIGHT	Asian
60A-SMFR	60	500	232	173	225	RIGHT	Asian
70A-SMF	70	580	278	175	190	RIGHT	European
70A-SMFL	70	620	269	173	222	RIGHT	Asian
70A-SMFR	70	620	269	173	222	LEFT	Asian
72A-SMF	72	640	278	175	175	RIGHT	European
100A-SMFL	100	800	307	173	225	RIGHT	Asian
100A-SMFR	100	800	307	173	225	LEFT	Asian
100A-SMF	100	800	353	175	190	RIGHT	European

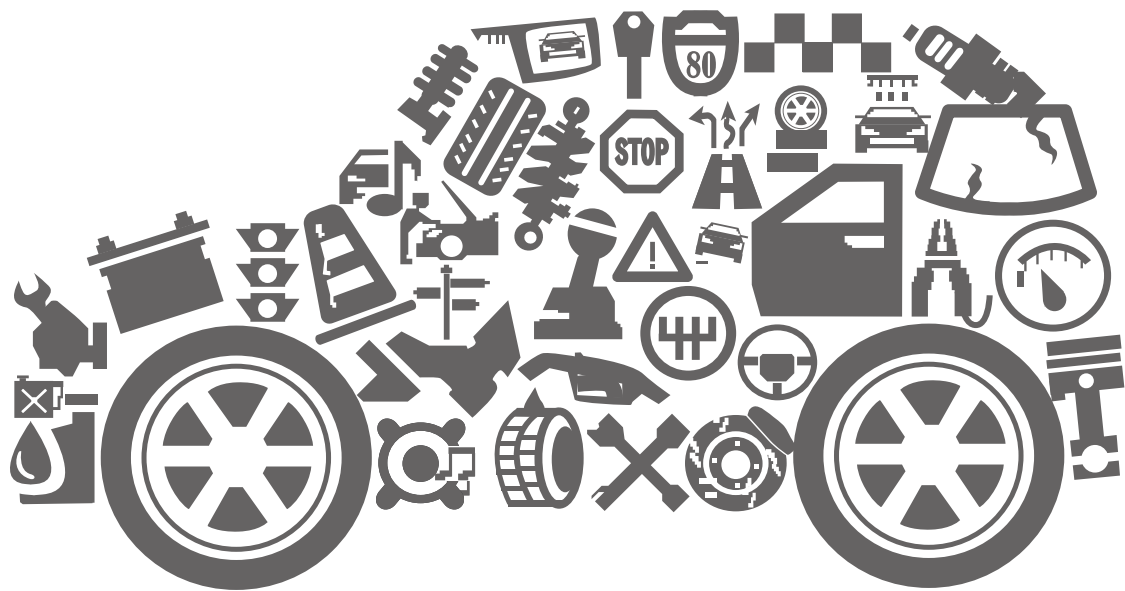