
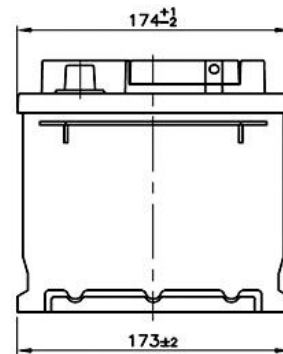
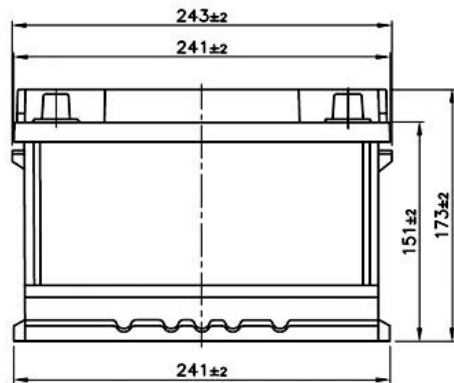
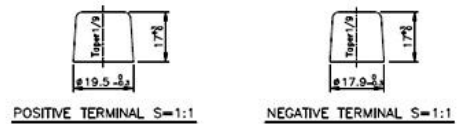


ELIX ULTRA X	TECHNICAL DATASHEET	Created:	9.12.2023
		Modified:	5.3.2024
TYPE	LB2		
CODE	U-55510		

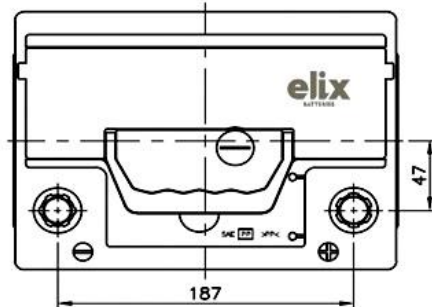

PERFORMANCES

Voltage (V):	12
C20(Ah):	55
Cold Cranking Ampere (A):	500 SAE
Charge Acceptance (A):	5,5
Plates per Cell (pcs):	12
Pos./ Grid Alloy:	Exp. / Pb-Ca-Sn
Neg./ Grid Alloy:	Exp. / Pb-Ca
Separator:	PE(Enveloped)

WEIGHT & DIMENSIONS (max.)

Battery Weight (kg):	12,9 (+/-2%) with acid
Lead Weight (kg):	7,420
Length (mm):	245
Width (mm):	175
Height (mm):	175
Total Height (mm) :	175

CONTAINER

Type:	LB2 Acc. To DIN
Hold Down:	B3
H.D.Adapter:	No

COVER

Type:	Flat/Seald -
Polarity:	(-,+) Cell layout
Terminal Adapter:	No
Magic Eye:	Yes 1 Ball
Degassing system	Yes Short side(CT)
Flame Arrestor	Yes 2pcs

PLUGS

Type:	No Vent Sealed
-------	----------------

HANDLE

Type:	1x intergated -
-------	-----------------

OTHERS

Degassing Tube:	No
-----------------	----