
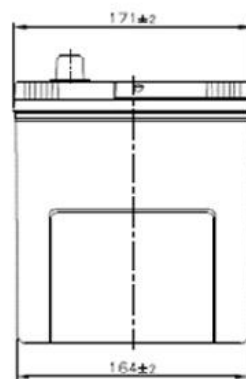
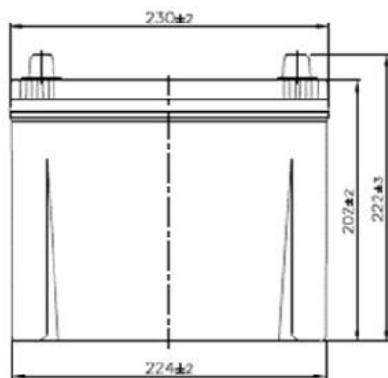



ELIX ULTRA X	TECHNICAL DATASHEET	Created:	9.12.2023
		Modified:	5.3.2024
TYPE	D26		
CODE	U-57041		

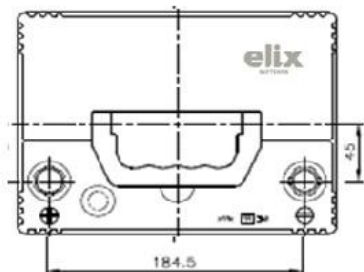

PERFORMANCES

Voltage (V):	12
C20(Ah):	70
Cold Cranking Ampere (A):	620 SAE
Charge Acceptance (A):	7
Plates per Cell (pcs):	13
Pos./ Grid Alloy:	Exp. / Pb-Ca-Sn
Neg./ Grid Alloy:	Exp. / Pb-Ca
Separator:	PE(Enveloped)

WEIGHT & DIMENSIONS (max.)

Battery Weight (kg):	17,4 (+/-2%) with acid
Lead Weight (kg):	9,39 base on ingot
Length (mm):	260
Width (mm):	174
Height (mm):	202
Total Height (mm) :	225

CONTAINER

Type:	D26 Acc. To JIS
Hold Down:	B9
H.D.Adapter:	No

COVER

Type:	Flat/Seald -
Polarity:	(+, -) Cell layout
Terminal Adapter:	No
Magic Eye:	Yes 1 Ball
Degassing system	Short side
Flame Arrestor	Yes 2pcs(filter)

PLUGS

Type:	No Vent Sealed
-------	----------------

HANDLE

Type:	Yes
-------	-----

OTHERS

Degassing Tube:	No
-----------------	----