

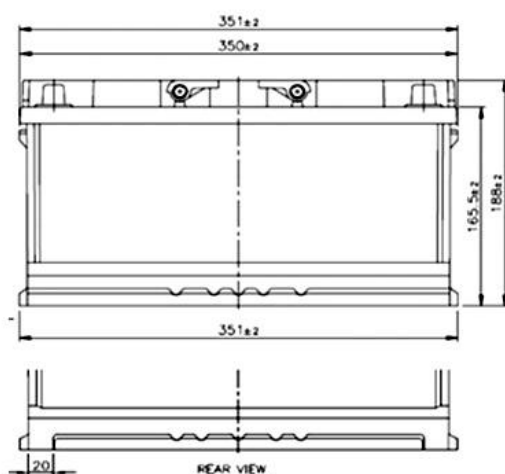


ELIX ULTRA X	TECHNICAL DATASHEET	Created:	04.03.2024
		Modified:	5.3.2024
TYPE	L5		
CODE	U-60020		

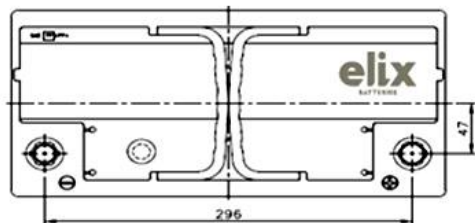

PERFORMANCES

Voltage (V):	12
C20(Ah):	100
Cold Cranking Ampere (A):	800 SAE
Charge Acceptance (A):	11
Plates per Cell (pcs):	18
Pos./ Grid Alloy:	Exp. / Pb-Ca-Sn
Neg./ Grid Alloy:	Exp. / Pb-Ca
Separator:	PE(Enveloped)

WEIGHT & DIMENSIONS (max.)

Battery Weight (kg):	21,2(+/-2%) with acid
Lead Weight (kg):	12,779
Length (mm):	353
Width (mm):	175
Height (mm):	190
Total Height (mm) :	190

CONTAINER

Type:	L5 Acc. To EN
Hold Down:	Yes
H.D.Adapter:	No Option

COVER

Type:	Double Lid -
Polarity:	(-,+) Cell layout
Terminal Adapter:	No
Magic Eye:	Yes
Degassing system	Short side
Flame Arrestor	Yes 2pcs(filter)

PLUGS

Type:	No Vent Sealed
-------	----------------

HANDLE

Type:	Yes -
-------	-------

OTHERS

Degassing Tube:	No
-----------------	----