

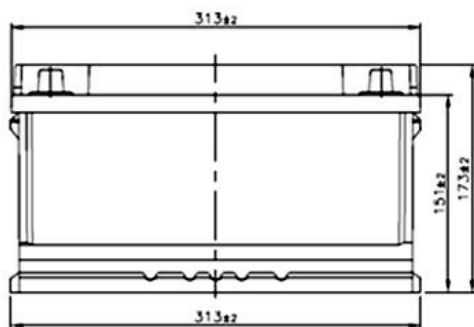
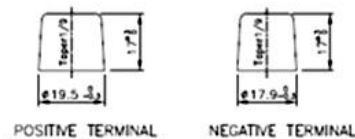


ELIX ULTRA X	TECHNICAL DATASHEET	Created:	9.12.2023
		Modified:	5.3.2024
TYPE	LB4		
CODE	U-58014		

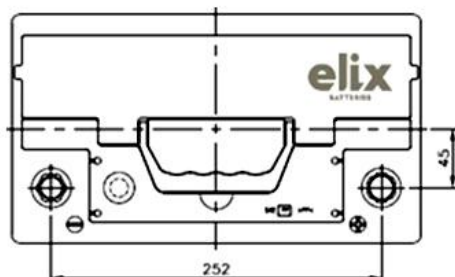

PERFORMANCES

Voltage (V):	12
C20(Ah):	80
Cold Cranking Ampere (A):	750 SAE
Charge Acceptance (A):	8
Plates per Cell (pcs):	19
Pos./ Grid Alloy:	Exp. / Pb-Ca-Sn
Neg./ Grid Alloy:	Exp. / Pb-Ca
Separator:	PE(Enveloped)

WEIGHT & DIMENSIONS (max.)

Battery Weight (kg):	18,7(+/-2%) with acid
Lead Weight (kg):	11,036
Length (mm):	315
Width (mm):	175
Height (mm):	175
Total Height (mm) :	175

CONTAINER

Type:	LB4 Acc. To EN
Hold Down:	Yes
H.D.Adapter:	No

COVER

Type:	Double Lid -
Polarity:	(-,+) Cell layout
Terminal Adapter:	No
Magic Eye:	Yes
Degassing system	Short side
Flame Arrestor	Yes 2pcs(filter)

PLUGS

Type:	No Vent Sealed
-------	----------------

HANDLE

Type:	Yes -
-------	-------

OTHERS

Degassing Tube:	No
-----------------	----