
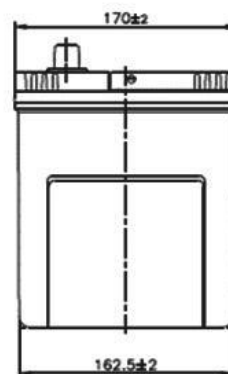
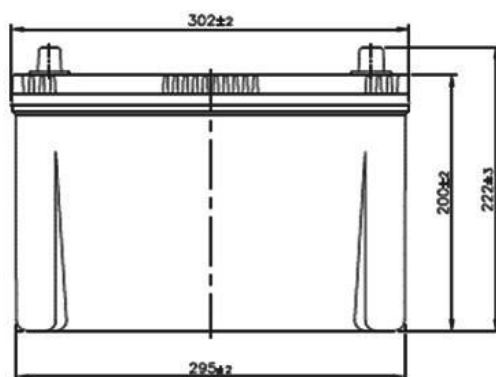


ELIX EFB START&STOP	TECHNICAL DATASHEET	Created:	9.12.2023
		Modified:	5.3.2024
TYPE	D31		
CODE	EFB-59540-S		

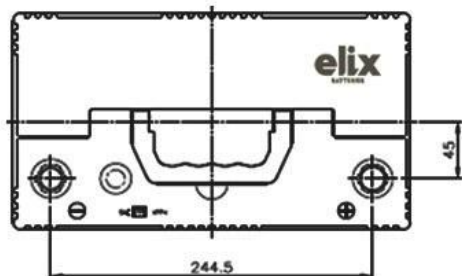

PERFORMANCES

Voltage (V):	0
C20(Ah):	95
Cold Cranking Ampere (A):	890 EN
Charge Acceptance (A):	19
Plates per Cell (pcs):	17
Pos./ Grid Alloy:	Exp. / Pb-Ca-Sn
Neg./ Grid Alloy:	Exp. / Pb-Ca
Separator:	PE(Enveloped)

WEIGHT & DIMENSIONS (max.)

Battery Weight (kg):	22,0 (+/-2%) with acid
Lead Weight (kg):	13,7 base on ingot
Length (mm):	302
Width (mm):	171
Height (mm):	200
Total Height (mm) :	222

CONTAINER

Type:	D31 Acc. To JIS
Hold Down:	B7
H.D.Adapter:	No

COVER

Type:	Flat/sealed type -
Polarity:	(-,+) Cell layout
Terminal Adapter:	No
Magic Eye:	Yes
Degassing system	Short side
Flame Arrestor	Yes 2pcs

PLUGS

Type:	No
-------	----

HANDLE

Type:	1x intergated
-------	---------------

OTHERS

Degassing Tube:	No
-----------------	----