
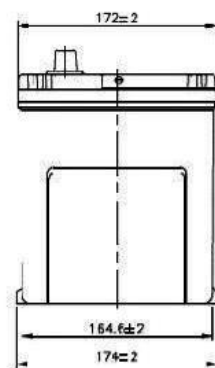


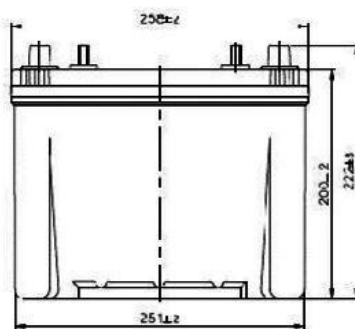


ELIX ULTRA X MARINE	TECHNICAL DATASHEET	Created:	31.01.2024
		Modified:	5.3.2024
TYPE	M24		
CODE	U-58024M		

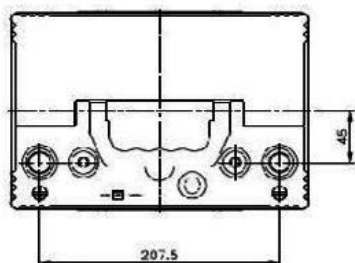

PERFORMANCES

Voltage (V):	0
C20(Ah):	80
Cold Cranking Ampere (A):	810 CA
Charge Acceptance (A):	8
Plates per Cell (pcs):	15
Pos./ Grid Alloy:	Exp. / Pb-Ca-Sn
Neg./ Grid Alloy:	Exp. / Pb-Ca
Separator:	PE(Enveloped)

WEIGHT & DIMENSIONS (max.)

Battery Weight (kg):	18,4(+/-2%)
Lead Weight (kg):	9,98
Length (mm):	260
Width (mm):	175
Height (mm):	197
Total Height (mm) :	222

CONTAINER

Type:	M24 Acc. To JIS
Hold Down:	B0
H.D.Adapter:	No

COVER

Type:	Flat/sealed type -
Polarity:	(-,+) Cell layout
Terminal Adapter:	No
Magic Eye:	No 1 Ball
Degassing system	Short side
Flame Arrestor	Yes 2pcs(filter)

PLUGS

Type:	No Vent Sealed
-------	----------------

HANDLE

Type:	Yes -
-------	-------

OTHERS

Degassing Tube:	No
-----------------	----