
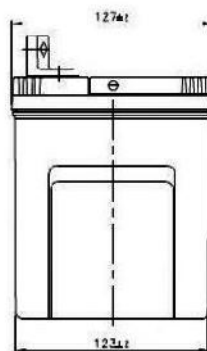
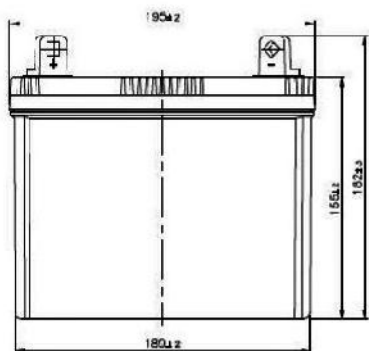
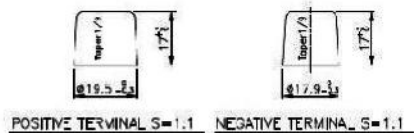


ELIX X	TECHNICAL DATASHEET	Created:	31.01.2024
		Modified:	5.3.2024
TYPE	U1		
CODE	X-52851-S		



PERFORMANCES

Voltage (V):	0
C20(Ah):	28
Cold Cranking Ampere (A):	260 EN
Charge Acceptance (A):	2.9
Plates per Cell (pcs):	10
Pos./ Grid Alloy:	Exp. / Pb-Ca-Sn
Neg./ Grid Alloy:	Exp. / Pb-Ca
Separator:	PE(Enveloped)

WEIGHT & DIMENSIONS (max.)

Battery Weight (kg):	7,6 with acid
Lead Weight (kg):	4,330
Length (mm):	197
Width (mm):	129
Height (mm):	157
Total Height (mm) :	185

CONTAINER

Type:	U1 BCI
Hold Down:	No Bo
H.D.Adapter:	No

COVER

Type:	Flat/Sealed type
Polarity:	(+, -) Cell Layout
Terminal Adapter:	Ford(U1)
Magic Eye:	No
Degassing system	Yes
Flame Arrestor	Yes

PLUGS

Type:	No Vent Sealed
-------	----------------

HANDLE

Type:	1x Integrated
-------	---------------

OTHERS

Degassing Tube:	No
-----------------	----