
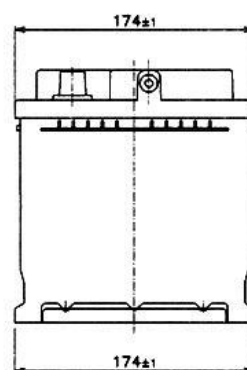
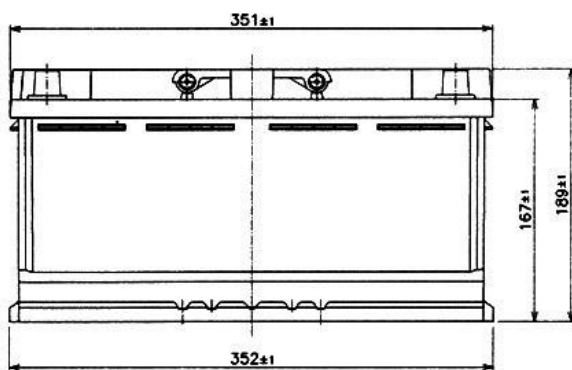
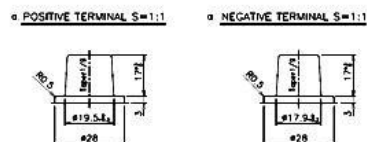


ELIX AGM START&STOP	TECHNICAL DATASHEET	Created:	31.01.2024
		Modified:	5.3.2024
TYPE	L5		
CODE	AGM-59220-S		

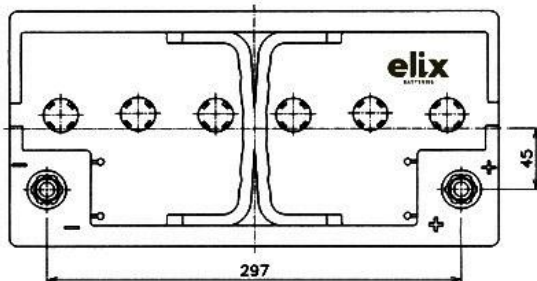

PERFORMANCES

Voltage (V):	0
C20(Ah):	92
Cold Cranking Ampere (A):	850 EN
Charge Acceptance (A):	23
Plates per Cell (pcs):	19
Pos./ Grid Alloy:	Punched / Pb-Ca-Sn
Neg./ Grid Alloy:	Concast / Pb-Ca-Sn
Separator:	AGM

WEIGHT & DIMENSIONS (max.)

Battery Weight (kg):	26,7 (+/- 2%) with acid
Lead Weight (kg):	19,38 base on ingot
Length (mm):	353
Width (mm):	175
Height (mm):	169
Total Height (mm) :	190

CONTAINER

Type:	L5 Acc. To EN
Hold Down:	Yes
H.D.Adapter:	No

COVER

Type:	Flat/sealed type -
Polarity:	(-,+) Cell layout
Terminal Adapter:	No
Magic Eye:	No 1 Ball
Degassing system	Short side
Flame Arrestor	Yes 2pcs(filter)

PLUGS

Type:	No Vent Sealed
-------	----------------

HANDLE

Type:	Yes -
-------	-------

OTHERS

Degassing Tube:	No
-----------------	----