



# EUROPEAN - ASIAN APPLICATIONS

TYPE	AH	CCA(-18°C) SAE	DIMENSIONS			TERMINALS	APPLICATIONS
			L	W	H		
40A-SMFLS	40	300	187	127	226	RIGHT	Hyundai Atos
40A-SMFL	35	300	187	127	226	RIGHT	Asian
40A-SMFR	35	300	187	127	226	LEFT	Asian
40A-SMF	40	350	175	175	190	RIGHT	European
44A-SMF	44	360	207	175	175	RIGHT	European
45A-SMF	45	400	238	129	225	RIGHT	Asian
45A-SMFLS	45	400	238	129	225	RIGHT	Low
45A-SMFRS	45	400	238	129	225	LEFT	Low
50A-SMF	50	380	208	175	190	RIGHT	European
53A-SMF	53	460	242	175	175	RIGHT	European
55A-SMF	55	500	242	175	175	RIGHT	European
60A-SMF	60	480	242	175	190	RIGHT	European
60A-SMFL	60	500	232	173	225	RIGHT	Asian
60A-SMFR	60	500	232	173	225	LEFT	Asian
70A-SMF	70	580	278	175	190	RIGHT	European
70A-SMFL	70	620	269	173	222	RIGHT	Asian
70A-SMFR	70	620	269	173	222	LEFT	Asian
72A-SMF	72	640	278	175	175	RIGHT	European
100A-SMFL	100	800	307	173	225	RIGHT	Asian
100A-SMFR	100	800	307	173	225	LEFT	Asian
100A-SMF	100	800	353	175	190	RIGHT	European




b a t t e r i e s



# HEAVY DUTY (SMF)

TYPE	AH	CCA(-18°C) SAE	DIMENSIONS			TERMINALS	APPLICATIONS
			L	W	H		
<b>122A-SMF</b>	122	<b>830</b>	514	175	190	<b>LEFT</b>	BHD
<b>152A-SMF</b>	152	<b>880</b>	514	189	223	<b>LEFT</b>	BHD
<b>180A-SMF</b>	180	<b>1000</b>	513	222	220	<b>LEFT</b>	European
<b>180A-SMFT</b>	180	<b>1000</b>	513	222	220	<b>LEFT</b>	European
<b>200A-SMF</b>	200	<b>1100</b>	513	222	220	<b>LEFT</b>	European
<b>210A-SMF</b>	210	<b>1200</b>	518	273	241	<b>LEFT</b>	European
<b>240A-SMF</b>	240	<b>1300</b>	518	273	241	<b>LEFT</b>	European

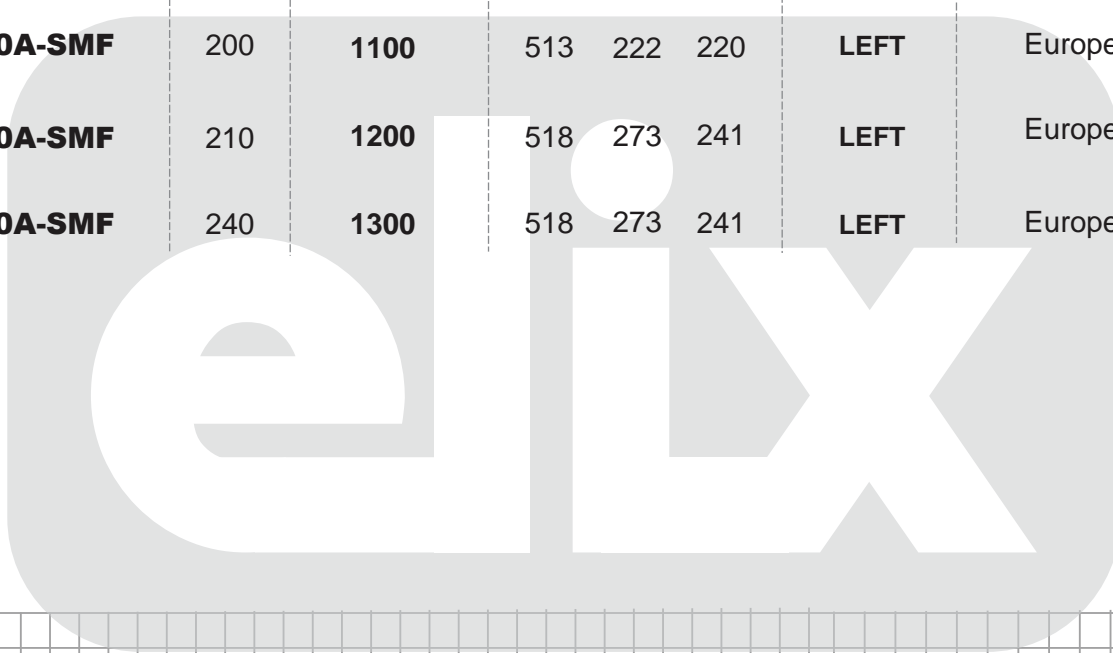

b a t t e r i e s



# GENERAL USE MARINE

TYPE	AH	SAE	APLLICATIONS	DIMENSIONS			TERMINALS
				L	W	H	
<b>M24-65A-SMF</b>	65	<b>500</b>	<b>MARINE</b>	260,	174,	222	<b>TM(LEFT)</b>
<b>M24-80A-SMF</b>	80	<b>680</b>	<b>MARINE</b>	260,	174,	222	<b>TM(LEFT)</b>
<b>M27-90A-SMF</b>	90	<b>730</b>	<b>MARINE</b>	304,	173,	225	<b>TM(LEFT)</b>
<b>M27-95A-SMF</b>	95	<b>780</b>	<b>MARINE</b>	304,	173,	225	<b>TM(LEFT)</b>
<b>M31-100A-SMF</b>	100	<b>850</b>	<b>MARINE</b>	330,	173,	240	<b>TM(LEFT)</b>



- Exclusive patented liquid separator
- Insulating Cover anti-ignition and avoid heat
- Low separators folders protect plates • Polypropylene container
- Processed lead calcium grids

Guarantee does not cover ► Smaller capacity  
 proposed placement of manufactured. ► Electrical system failure  
 of the vehicle such as overload, current leakage.  
 ► Any break. ► Immobility of the vehicle.